



Acoustic Transfer Sleeve

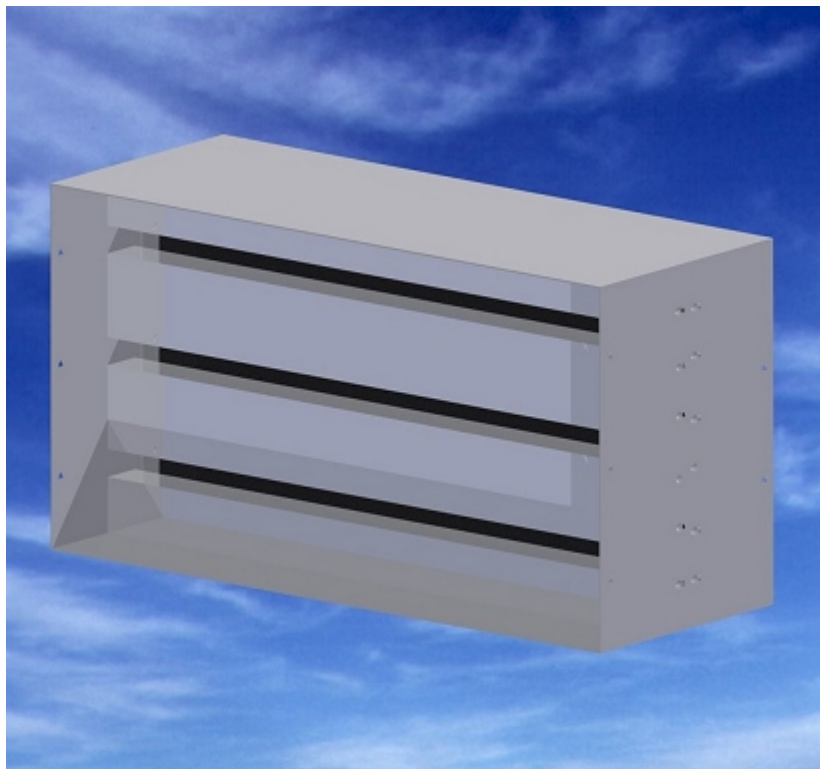

AIR IN MOTION

Acoustic Transfer Sleeves are suitable for use in doors and partitions where ventilation and a reduction in noise transfer from one area to another is required. The Acoustic Transfer Sleeve is manufactured from sheet metal. The channel sections are internally lined with acoustic media.

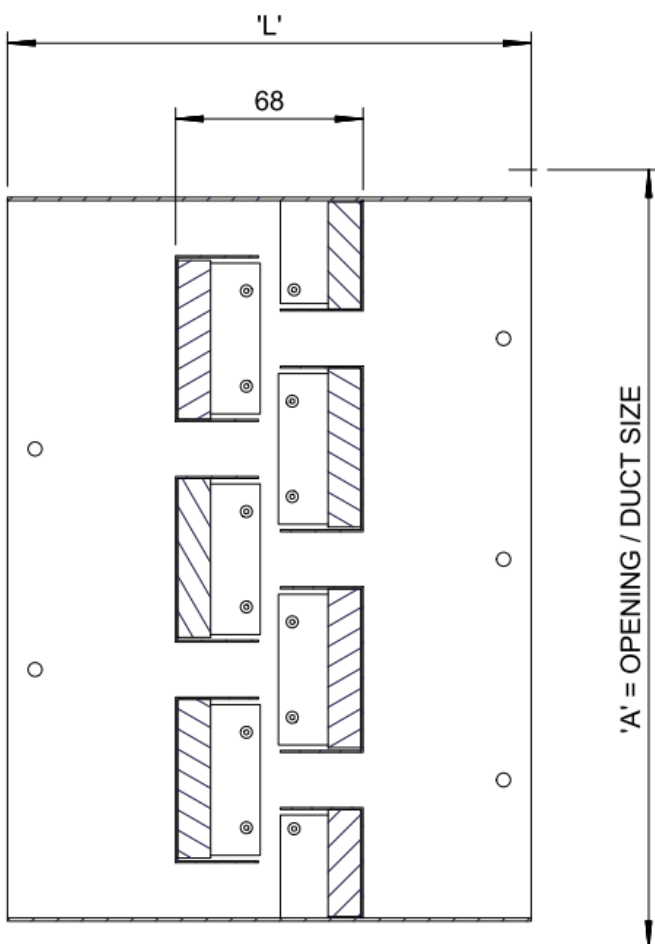

Dimension 'L' can vary to suit application

Performance data

DTG/AG Single Unit		
Volume	Dimension A Opening/Duct size	Pressure loss Pa.
0.03	325 X 205	16
0.04		27
0.05		45
0.03	325 X 285	12
0.04		15
0.05		27
0.06		32
0.07		40
0.08		45
0.04	425 X 365	10
0.05		12
0.06		14
0.07		17
0.08		20
0.09		25
0.10		30
0.11		33
0.12		35
0.13		38
0.14		42
0.15		45
0.07	525 X 445	10
0.08		12
0.09		14
0.10		16
0.11		18
0.12		20
0.13		22
0.14		25
0.15		28
0.16		30
0.17		32
0.18		35
0.19		37
0.20		40
0.21		42
0.22		44
0.23		46

DTG/AC - Single Unit								
Frequency (Hz)	63	125	250	500	1000	2000	4000	8000
Transmission loss (dB)	2	3	3	5	7	11	13	18