



# ODS SWIRL DIFFUSER

Suitable for ceiling mounting and can be manufactured to suit most ceiling tile arrangements. The blade pattern is designed to offer high induction of room air and the rapid decay of supply air velocities and temperature differentials.

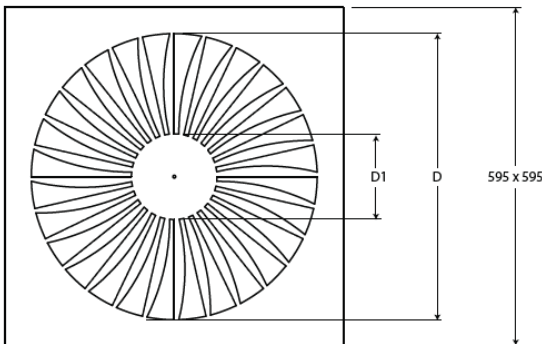

*Diffuser Dimensions - Square*

Nom Size	O/A	D	D1
254	595 x 595	254	84
350	595 x 595	350	92
450	595 x 595	450	150
540	595 x 595	540	170

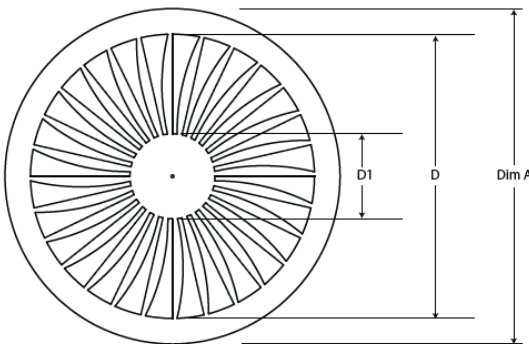

*Diffuser Dimensions - Circular*

Nom Size	AØ	C	D1
254	300	254	84
350	400	350	92
450	500	450	150
540	600	540	170

## How To Order

Type	No of Blades	Edge Detail	Tegular Depth	Size	Overall Size	RAL Colour
ODS	28	L - Lay-In Grid T15 - Tegular 584 x 584 T24 - Tegular 574 x 574 M - Clip-In Metal Tile C - Circular	e.g. 14mm	254 350 450 540	595 x 595 599 x 599	e.g. RAL 9010
e.g. 10 No ODS - 28 - L - 450 - 595 x 595 - RAL 9010						

# ODS SWIRL DIFFUSER

Performance Data

Size										
254 Dia	I/s	20	25	30	35	40	45	50	55	60
	Throw m	0.6 - 1.1	0.7-1.4	0.8-1.7	1.0-1.9	1.1-2.2	0.2-2.5	1.4-2.8	1.5-3	1.6-3.3
	Pa	3	5	8	11	14	18	22	26	31
	NC						16	20	23	25
	I/s	65	70	75	80					
	Throw m	1.8-3.6	1.9-3.9	2.0-4.1	2.2-4.4					
	Pa	37	43	49	56					
350 Dia	NC	30	32	34	36					
	I/s	50	55	60	65	70	80	90	100	110
	Throw m	1.0-2.1	1.2-2.3	1.2-2.5	1.3-2.7	1.4-2.9	1.6-3.3	1.9-3.8	2.0-4.2	2.3-4.6
	Pa	6	7	9	10	12	16	20	25	30
	NC					15	17	21	24	27
	I/s	120	130	140	150	160				
	Throw m	2.6-5.0	2.7 - 5.4	2.8 - 5.8	3.2 - 6.3	3.5 - 6.7				
450 Dia	Pa	35	41	48	55	63				
	NC	32	35	37	39	40				
	I/s	75	80	90	100	110	120	130	140	150
	Throw m	1.2-2.5	1.3-2.7	1.6-3.1	1.7-3.4	1.8-3.7	2.0-4.0	2.1-4.4	2.4-4.7	2.5-5
	Pa	9	11	14	17	20	24	28	33	38
	NC	16	18	21	24	27	29	32	34	36
	I/s	160	170	180	190	200				
540 Dia	Throw m	2.7-5.4	2.9-5.7	3.0-6.1	3.2-6.4	3.3-6.7				
	Pa	43	49	51	61	67				
	NC	37	39	41	42	44				
	I/s	100	110	120	130	140	150	160	170	180
	Throw m	1.7-3.4	1.8-3.7	2.0-4.1	2.2-4.4	2.4-4.7	2.6-5.1	2.7-5.4	2.8-5.7	3.2-6.1
	Pa	9	11	13	16	18	21	23	27	30
	NC	16	19	21	24	26	28	29	31	33
540 Dia	I/s	190	200	210	220	230	240	260		
	Throw m	3.2-6.4	3.5-6.8	3.6-7.1	3.7-7.4	4.0-7.8	4.1-8.1	4.3-8.4		
	Pa	33	37	40	44	49	53	57		
	NC	34	36	37	38	40	41	42		

**NOTE:**

All throws based on terminal velocities of 0.5 - 0.25 m/s  
 For Return Air Applications Multiply Pa x 0.75, NC Levels remain the same